



STAPLE


non-pvc seating




GRADE
1

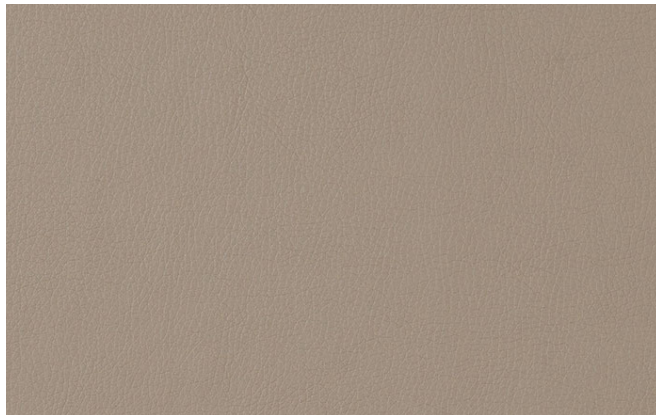


 STP 79 Telluride




STP 64 Camel




STP 80 Lace





 STP 66 Mist



STP 69 Spruce



 STP 68 Morel




STP 63 Malt




 STP 82 Castle




STP 86 Marsh





 STP 84 Elk




STP 61 Butterscotch




 STP 74 Nautical




STP 73 Academy





STP 70 Tempest




STP 67 Fire




 STP 60 Raven



STP 78 Voyage



STP 76 Mink



STP 87 Madera

 Via Seating quick ship fabric

Stinson

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Fluid barrier
- Contains an antimicrobial
- Bleach-solution cleanable

Cleaning and Maintenance

Cleaning code: **(W-S)** For water based stains use water based cleaning agents only, do not use solvents. For oil based stains use solvent cleaners only.

Bleach solutions of up to 20% may be used for more difficult stains.

For additional cleaning information visit cfstinson.com

For complete specifications visit cfstinson.com

Dye lots may vary slightly from samples shown.

*This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

† Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Specifications




Content	Polyurethane made with Polycarbonate and Polyester resins
Finish	Inherent Soil & Stain Protection
Backing	Polyester / Cotton
Weight	20.5 oz. +/- 1.0 oz. per linear yard
Width	54"

Performance Characteristics

Abrasion Resistance † ASTM D4157	Exceeds 200,000 double rubs - Heavy Duty
Break Strength ASTM D5034	Warp: 130 lbs. min., Fill: 120 lbs. min.
Tear Strength ASTM D2261	Warp: 17 lbs. min., Fill: 13 lbs. min.
Seam Slippage ASTM D4034	Warp: 61 lbs. min., Fill: 81 lbs. min.
Colorfastness to Light AATCC 16	100 Hrs, Class 4 min.
Crocking AATCC 8	Dry: Class 5, Wet: Class 5
Fluid Barrier	Integrated Fluid Barrier
Hydrolytic Stability ASTM D3690-02 Section 6.11	Passes a minimum of 5 years; making it suitable for high-traffic commercial environments.
Antimicrobial	This product features an antimicrobial agent which inhibits the growth of microbes on the protected surface.

Flammability*

California TB 117 - 2013, Section 1	Passes
IMO A.652 (16) 8.2	Passes
MVSS 302	Passes
NFPA 260	Class 1
UFAC	Class 1
	May contribute to compliance with California Technical Bulletin 133 when used in conjunction with other suitable components.
	This product is Non PVC.



Grade 1 valid through 2024. Call customer service at 1.800.433.6614 if beyond 2024.

Stinson

W cfstinson.com P 800-841-6279 F 248-299-3884



Visit ViaSeating.com or call us at 800-433-6614.

205 Vista Blvd Sparks NV 89434

