


ULTRAFABRICS COLLECTIONS

GRADE
5

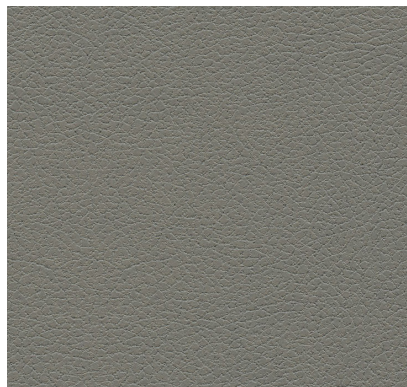

Brisa & Brisa Distressed

533-5802 Ash



535-3273 Shield*



533-8269 Yukon Gold



533-4345 Honeydew



533-5820 Quicksilver




533-3946 New Sand




533-3591 Caramel




533-4303 Seaweed



535-5679 Iron*




533-3913 Truffle



533-1373 Salsa




533-2794 Rising Tide



533-5749 Black Onyx



291-5776 Classic Grey



291-3778 Pecan



291-7234 Emerald Isle



291-5666 Dove Grey



291-5684 Arctic




291-1412 Earthenware




291-2716 High Seas




291-5806 Schooner




291-1256 Papyrus




291-1312 Chianti



291-2556 Admiral




291-5607 Raven Wing

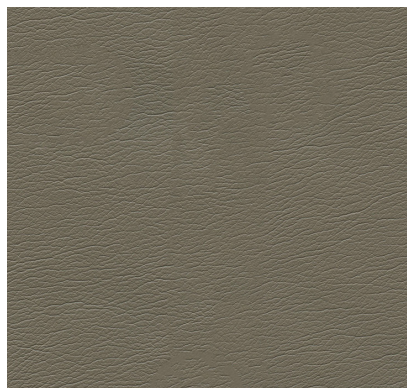

Ultraleather

291-3286 Moth Wing




363-3464 Tusk




363-3786 Buttered Toffee



363-7239 Aqua Spring




363-5354 Galaxy Fog



363-3785 Desert Taupe




363-3145 Bronze




363-2792 Lake Blue



363-5011 Battleship



363-3462 Woodpecker



363-1443 Rumba Red



363-2672 Corn Flour



363-5845 Ebony



Promessa


363-5818 Ash




744-35593 String




744-52173 Wax



744-43503 Jalapeno



744-53453 Gull



744-53483 Beechnut




744-35553 Old Penny




744-25033 Copen Blue




744-60873 Gris




744-36513 Tarmac




744-14223 Firebrick



744-27863 Blue Graphite



744-60883 Cast Iron

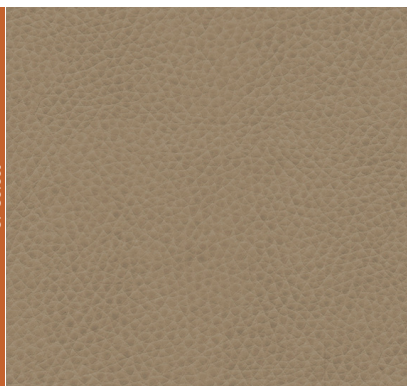

Montage

744-50393 Horseradish

Brisa Distressed*

VIA QUICKSHIP FABRIC

Collection	Composition	Weight/Thickness	Repeat	Abrasion	Air Permeability / Sound Absorption
Brisa (Grade 5) Brisa Distressed (Grade 5) Breathable Comfort Acoustics	100% Polycarbonate Polyurethane Surface 65% Recycled Polyester, 35% Rayon Backing	8.9 oz. per sq. yard / Approx. 0.95 mm	8"V x 10.5"H (Brisa Distressed)	ASTM D4157 300,00 DR Wyzenbeek	ASTM D737 / ASTM C423
Ultraleather (Grade 5)	100% Polycarbonate Polyurethane Surface 100% Rayon Backing containing TENCEL™ Modal fibers	9.7 oz. per sq. yard / Approx. 0.95 mm	N/A	ASTM D4157 400,00 DR Wyzenbeek	N/A
Promessa (Grade 5)	100% Polycarbonate Polyurethane Surface 65% Recycled Polyester, 35% Rayon Backing	11.5 oz. per sq. yard / Approx. 1.1 mm	N/A	ASTM D4157 400,00 DR Wyzenbeek	N/A
UF Select					
Montage (Grade 3)	100% Polycarbonate Blended Surface 65% Polyester, 35% Cotton Backing		N/A	ASTM D4157 3200,00 DR Wyzenbeek	N/A

Width: 54"

Hydrolysis: 16 Weeks (10 Weeks Montage)
ASTM D3690 SECT, 6.11 (Hydrolytic Stability) / ISO 1419 Method C (Accelerated Ageing)

F/R Rating: ASTM E84 (adhered) - Class A
CA TB 117 - Pass
FMVSS 302 & 95/28 ANNEX IV - Pass
NFPA 260 - Class 1
UFAC - Class 1
AB 2998

Can be treated to meet FAR specifications. These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of ASTM E84 (unadhered), BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5), IMO FTPC Part 8, and BS EN 1021 Parts 1 & 2.

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D751

Seam Strength: ASTM D751 (Tack Tear)

Tensile Strength: BS EN ISO 1451

Colorfastness to Crocking: AATCC 8, Grade 4-5, Wet & Dry

Colorfastness to Light: AATCC 16.3, 200 Hours, Grade 4 ISO 105 B02, Grade 6

*Removal of most denim dye may vary depending on the quality of dye and the period of time the stain sets in. Dye transfer is difficult to control, not always preventable and may be irreversible. For more information on certifications and standards, sustainability as well as cleaning and care instructions, please visit our website.

Via Seating
205 Vista Blvd
Sparks, NV 89434
T 800.433.6614
www.viaseating.com



TENCEL™ is a trademark of Lenzing AG

ultrafabricsinc.com
Ultrafabrics® and logo, Brisa®, Promessa®, Ultraleather®, and UF Select® are registered trademarks of Ultrafabrics Inc. Made in Japan.
UF Select Made in Mexico.

